

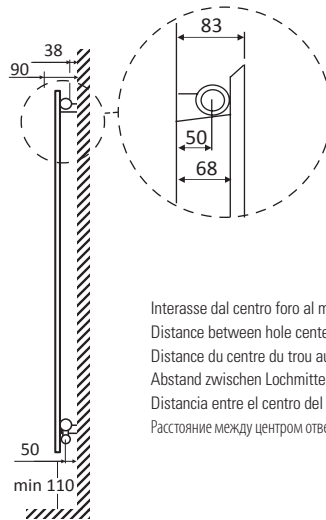


# ICE CLEAN SINGLE VERTICAL

3D-  
BIM

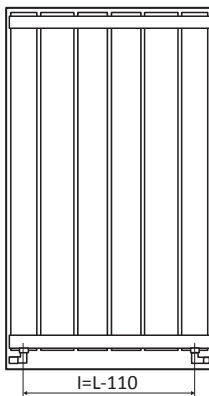

Interasse dal centro foro al muro 50 mm.  
Distance between hole center and wall 50 mm.  
Distance du centre du trou au mur 50 mm.  
Abstand zwischen Lochmitte und Wand 50 mm.  
Distancia entre el centro del agujero y el muro 50 mm.  
Расстояние между центром отверстия и стеной – 50 мм.

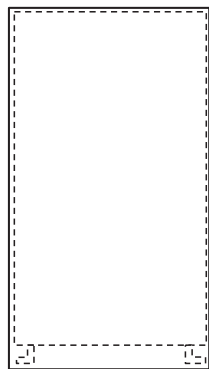

\*\*\*  
**EN 442**  
EURO NORM

codice code code Artikel Nr. codigo код	altezza height hauteur Höhe altura высота	larghezza width largeur Breite ancho ширина	interasse distance between bars entraxe Achsabstand distancia entre centros междцентровое расстояние	peso weight poids Gewicht peso вес	output мощность 75/65-20 watt	Watt = Kcal/h ÷ 0,860 Kcal/h = Watt × 0,860		
						output мощность 55/45-20 watt	output мощность 55/45-24 watt	output мощность 55/45-24 watt
	H mm	L mm	I mm	Kg	Δt50	Δt30	Δt26	
FICECL08455...	820	465	355	14	329	175	147	
FICECL08605...	820	615	505	16	438	233	195	
FICECL12380...	1220	390	280	19	408	210	180	
FICECL12455...	1220	465	355	21	490	259	216	
FICECL12530...	1220	540	430	24	572	301	252	
FICECL12605...	1220	615	505	26	653	344	288	
FICECL12755...	1220	765	655	32	817	431	360	
FICECL15380...	1520	390	280	24	496	255	216	
FICECL15455...	1520	465	355	28	595	314	262	
FICECL15605...	1520	615	505	36	793	418	350	
FICECL15755...	1520	765	655	41	992	523	436	
FICECL18305...	1820	315	205	23	461	243	203	
FICECL18380...	1820	390	280	28	576	303	253	
FICECL18455...	1820	465	355	31	690	364	303	
FICECL18530...	1820	540	430	35	805	424	354	
FICECL18605...	1820	615	505	41	921	485	405	
FICECL18680...	1820	690	580	46	1036	545	456	
FICECL18755...	1820	765	655	51	1151	606	410	
FICECL20305...	2020	315	205	26	498	261	217	
FICECL20380...	2020	390	280	31	622	326	272	
FICECL20455...	2020	465	355	35	747	391	326	
FICECL20530...	2020	540	430	39	871	456	380	
FICECL20605...	2020	615	505	45	996	521	435	
FICECL20680...	2020	690	580	50	1120	587	489	
FICECL20755...	2020	765	655	56	1245	651	543	
FICECL22305...	2220	315	205	29	533	277	231	
FICECL22380...	2220	390	280	34	665	346	288	
FICECL22455...	2220	465	355	38	798	415	346	
FICECL22530...	2220	540	430	42	931	485	404	
FICECL22605...	2220	615	505	48	1065	554	462	
FICECL22680...	2220	690	580	54	1198	624	519	
FICECL22755...	2220	765	655	60	1331	693	577	

Pressione di esercizio: 4 bar  
**Materiale: Acciaio al carbonio**

Working pressure: 4 bar.  
**Material: carbon-steel**

Pression d'exercice: 4 bars  
**Matériel: Acier**

Betriebsdruck: 4 bar  
**Material: Kohlenstoffstahl**

Presión de trabajo: 4 bar  
**Material: Acero de carbon**

Рабочее давление – 4 бар  
Под заказ радиаторы могут проходить испытание при 16 бар в случае рабочего давления 12 бар.  
Повышение цен на 7%.  
**Материал – углеродистая сталь.**

L'allacciamento idraulico è a scomparsa disponibile solo con valvole "corner"

Standard concealed water connection available only with "corner" valve

Le branchement hydraulique est dissimulé disponible seulement avec « corner » valves

Unsichtbarer Anschluss nur mit „Corner“ Ventile verfügbar

El sistema hidráulico es oculto disponible solo que con válvulas "corner"

система скрыта доступны только с помощью специальных клапанов