


ITALO INOX SATINATO BROSSÉ



Interasse dal centro foro al muro
min. 73 / max 96 mm.
Distance between hole center and wall
min. 73 / max 96 mm.
Distance du centre du trou au mur
min. 73 / max 96 mm.
Abstand zwischen Lochmitte und Wand
min. 73 / max 96 mm.
Distancia entre el centro del agujero
y el muro min. 73 / máx 96 mm.
Расстояние между центром отверстия и стеной
– не менее 73 мм и не более 96 мм.

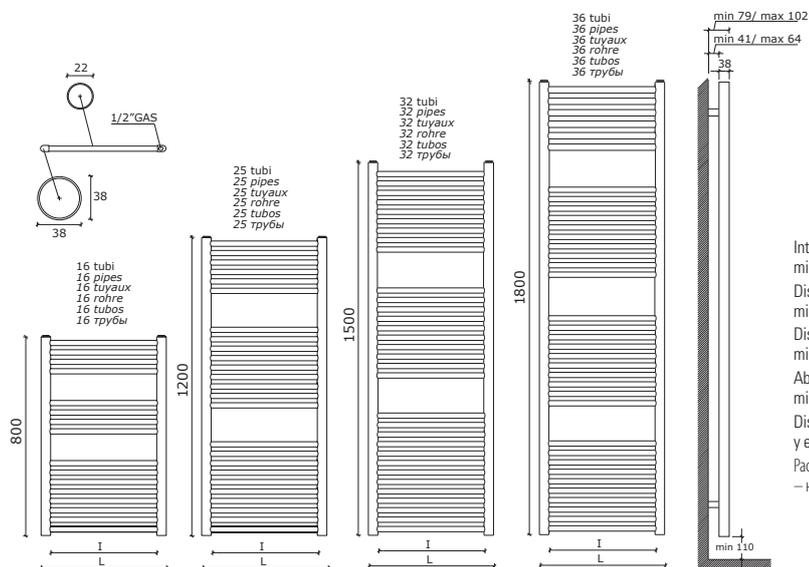

codice code code Artikel Nr. codigo код	altezza height hauteur Höhe altura высота	larghezza width largeur Breite ancho ширина	interasse distance between bars entraxe Achsabstand distancia entre centros междюстровое расстояние	Watt = Kcal/h ÷ 0,860 Kcal/h = Watt × 0,860		
				75/65-20 watt/kcal/h Δt50	55/45-20 watt/kcal/h Δt30	55/45-24 watt/kcal/h Δt26
400725XS	800	400	362	209	107	103
500725XS	800	500	462	261	133	128
401225XS	1200	400	362	313	160	154
501225XS	1200	500	462	391	200	192
401525XS	1500	400	362	386	197	189
501525XS	1500	500	462	483	247	237
501825XS	1800	500	462	580	296	284

Materiale: **INOX AISI 304**
Pressione di esercizio:
4 bar

Materiale: **INOX AISI 304**
Working pressure: 4 bar

Matériel: **INOX AISI 304**
Pression d'exercice:
4 bars

Material: **INOX AISI 304**
Betriebsdruck: 4 bar

Material: **INOX AISI 304**
Presión de trabajo: 4 bar

Материал – **INOX AISI 304**
Рабочее давление - 4 бар



cod. 101094 - 101094CR	cod. 10101934 - 10101934CR	cod. 10107834 - 10107834CR	cod. C409BI - C409CR
p./S. 400	p./S. 390	p./S. 392	p./S. 394